



**SPIERINGS
KRANEN**

Mark: **SPIERINGS** Typ: **SK365-AT3**

Crane identification


Serial number: <input type="text"/>	Crane group : 3 as per NEN 2018 Loadspectrum : 2 as per NEN 2018 Classification : A as per NEN 2018 Stability : as per NEN 2022	Identification- number 57 tm	Max. load 5,0 tonne	Max.radius with max. load 12,1 m	Max. capacity 60 tm	Max. jib lenght 30,4 m
Year of construction: _____						

Speeds


Jib horizontal / jib 30° luffed	
	m/min kg
	15 5000
	22 2500
	30 1700
	50 0
	0 - 50 m/min
	0 - 1,3 rpm


All motions with hydraulic proportional controls
Luffing the Jib 30° can be controlled from crane cab or via remote control
Driving with erected tower and jib, only with the jib horizontal and positioned over the front carriage, platform locked to the carrier and the outriggers fully extended (max. inclination 2°)
Rated lifting capacity is net capacity
Crane equipped with full counterweight: 7080 kg
360° continuous slewing, with outriggers out and down
2 Outriggers positions: 6,90 x 5,80 m
6,90 x 4,20 m
Operation allowed up to a windforce of 8 on the Beaufortscale. (wind speed 20 m/sec.)
Sail area of the load max. 1,0 m² / tonne at a windforce of 8 on the Beaufortscale.
Operating temperature range from -15° to 40° C.
In all cases 2 parts of line
Max. line pull force 2500 kg
The crane should be folded in at a windforce >9 (21m/sec) or when not in use for a longer period

LIFTING CHART Outrigger spread 6,90 m x 5,80 m

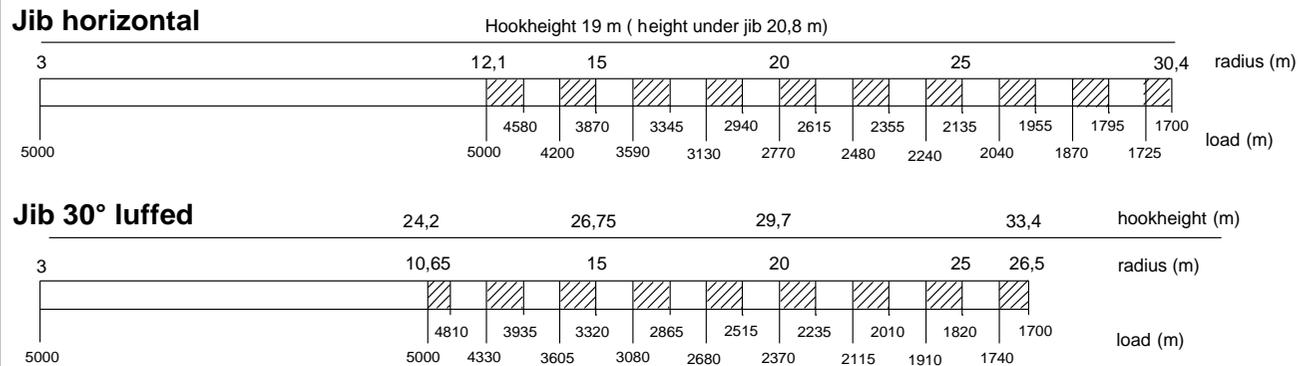

LIFTING CHART Outrigger spread 6,90 m x 4,20 m

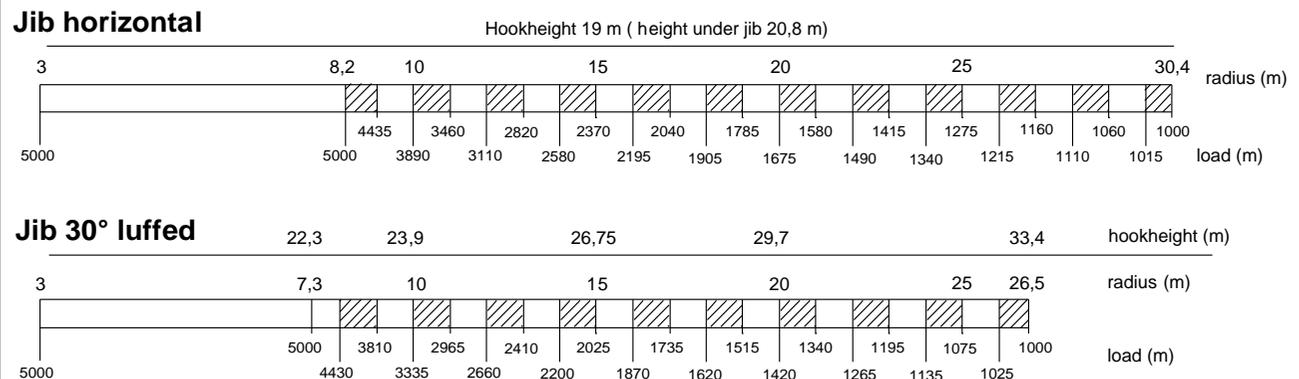

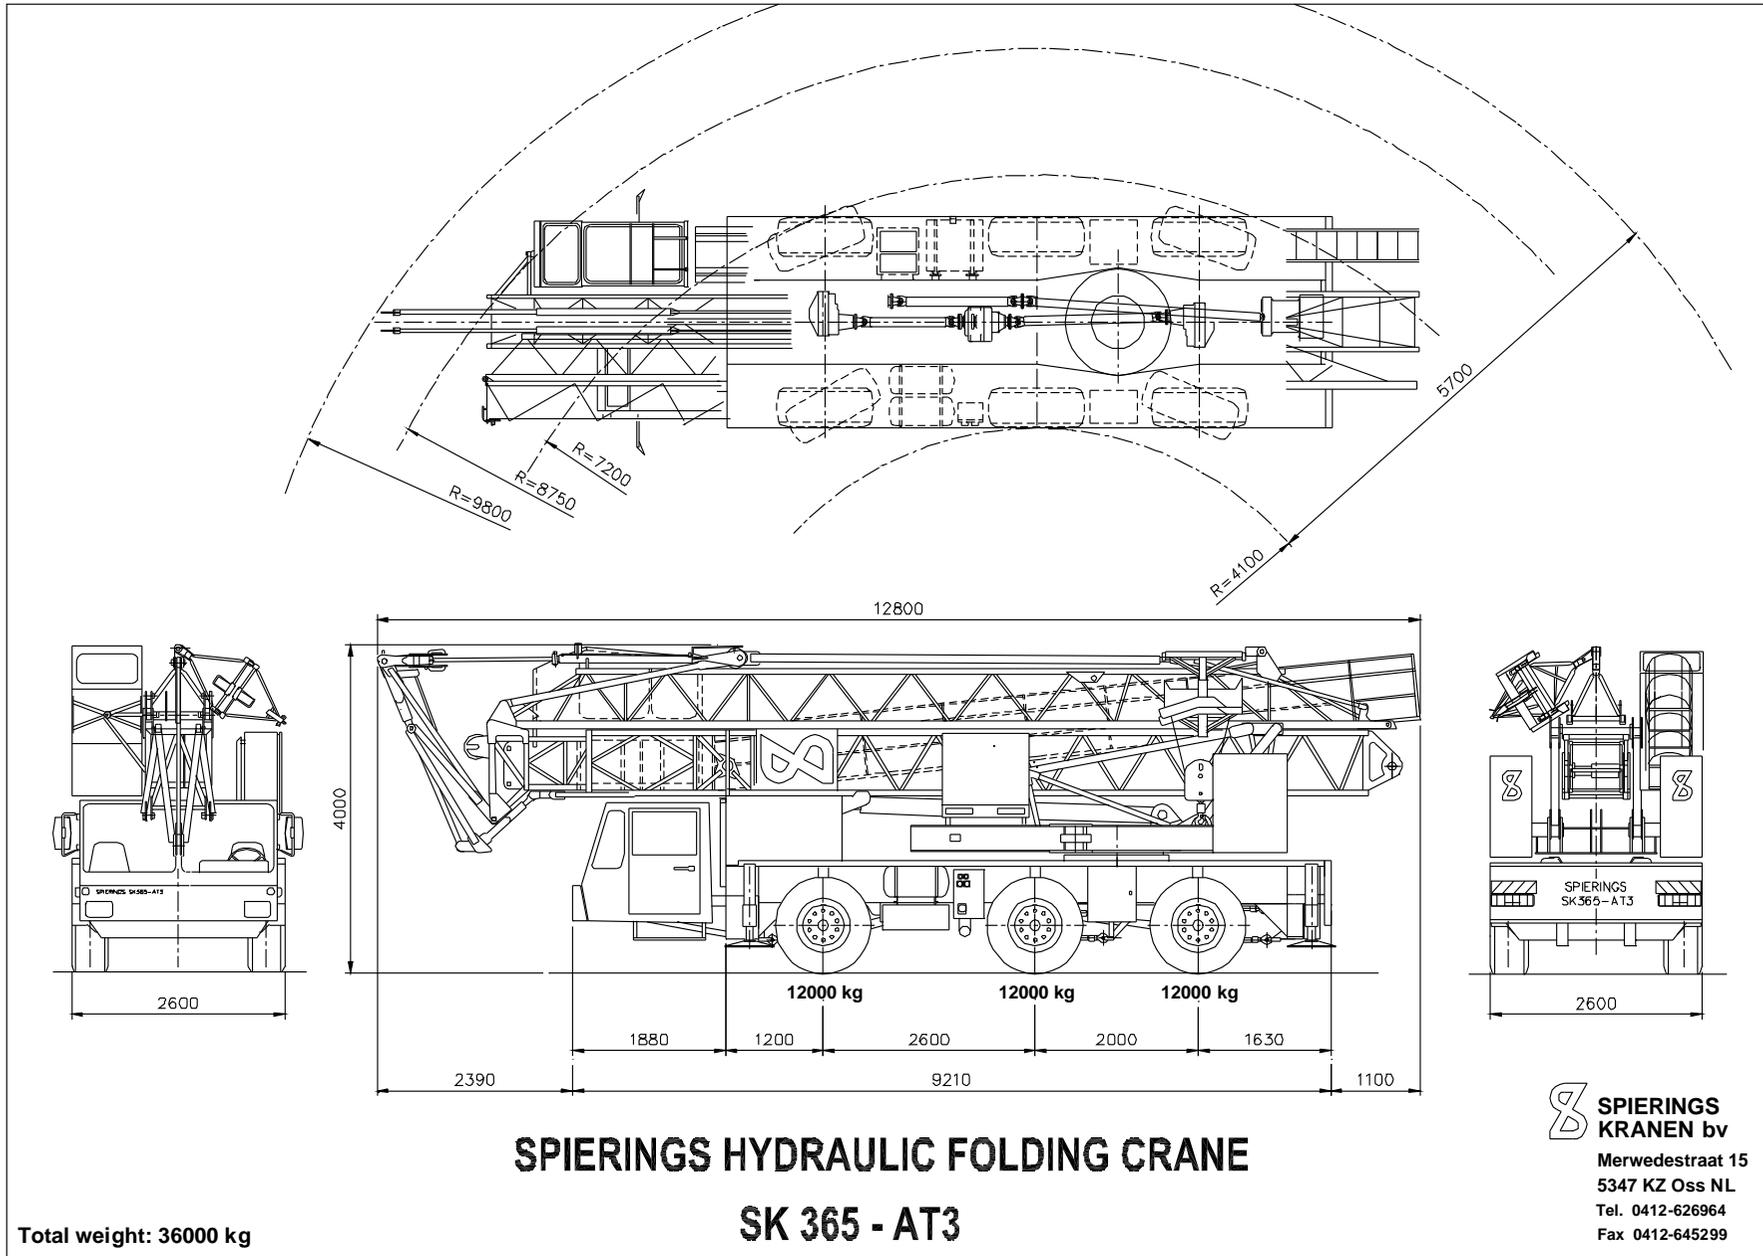


Total weight: 36000 kg

SPIERINGS HYDRAULIC FOLDING CRANE
SK 365 - AT3

SPIERINGS
KRANEN bv
 Merwedestraat 15
 5347 KZ Oss NL
 Tel. 0412-626964
 Fax 0412-645299

Max. outrigger loading: 250kN
 Outrigger foot: 750x600 mm
 Pressure under foot: 0.55 N/mm²
 Jib can be unfolded trough 360°
 Luffing the jib 30° can be controlled from de crane cab

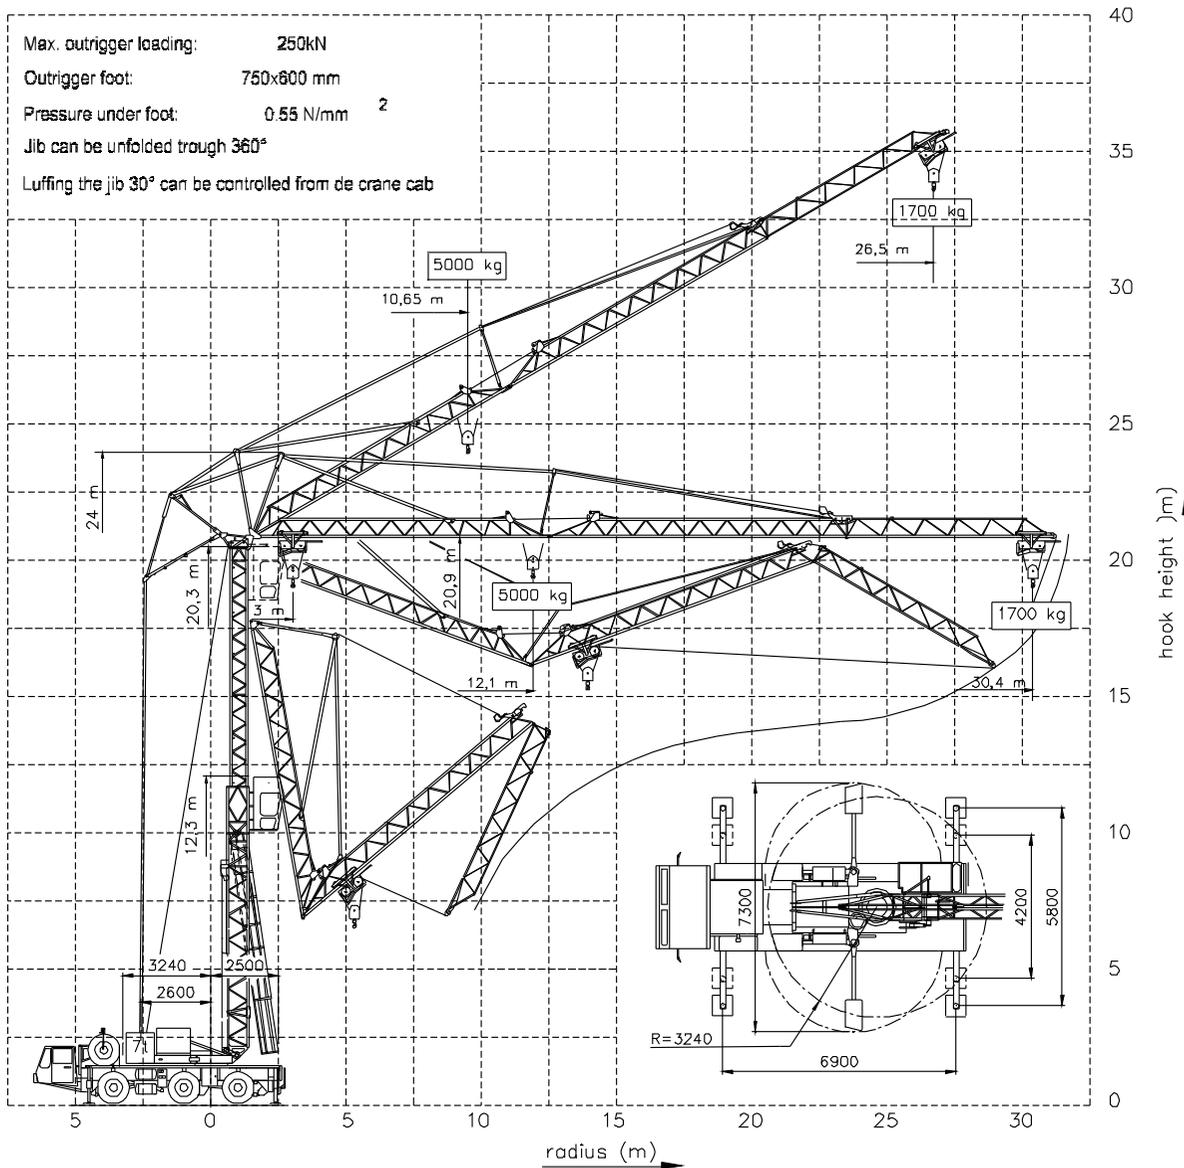


SPIERINGS HYDRAULIC FOLDING CRANE SK 365 - AT3



**SPIERINGS
KRANEN bv**
 Merwedestraat 15
 5347 KZ Oss NL
 Tel. 0412-626964
 Fax 0412-645299




SPIERINGS
HYDRAULIC FOLDING CRANE
SK 365 - AT3

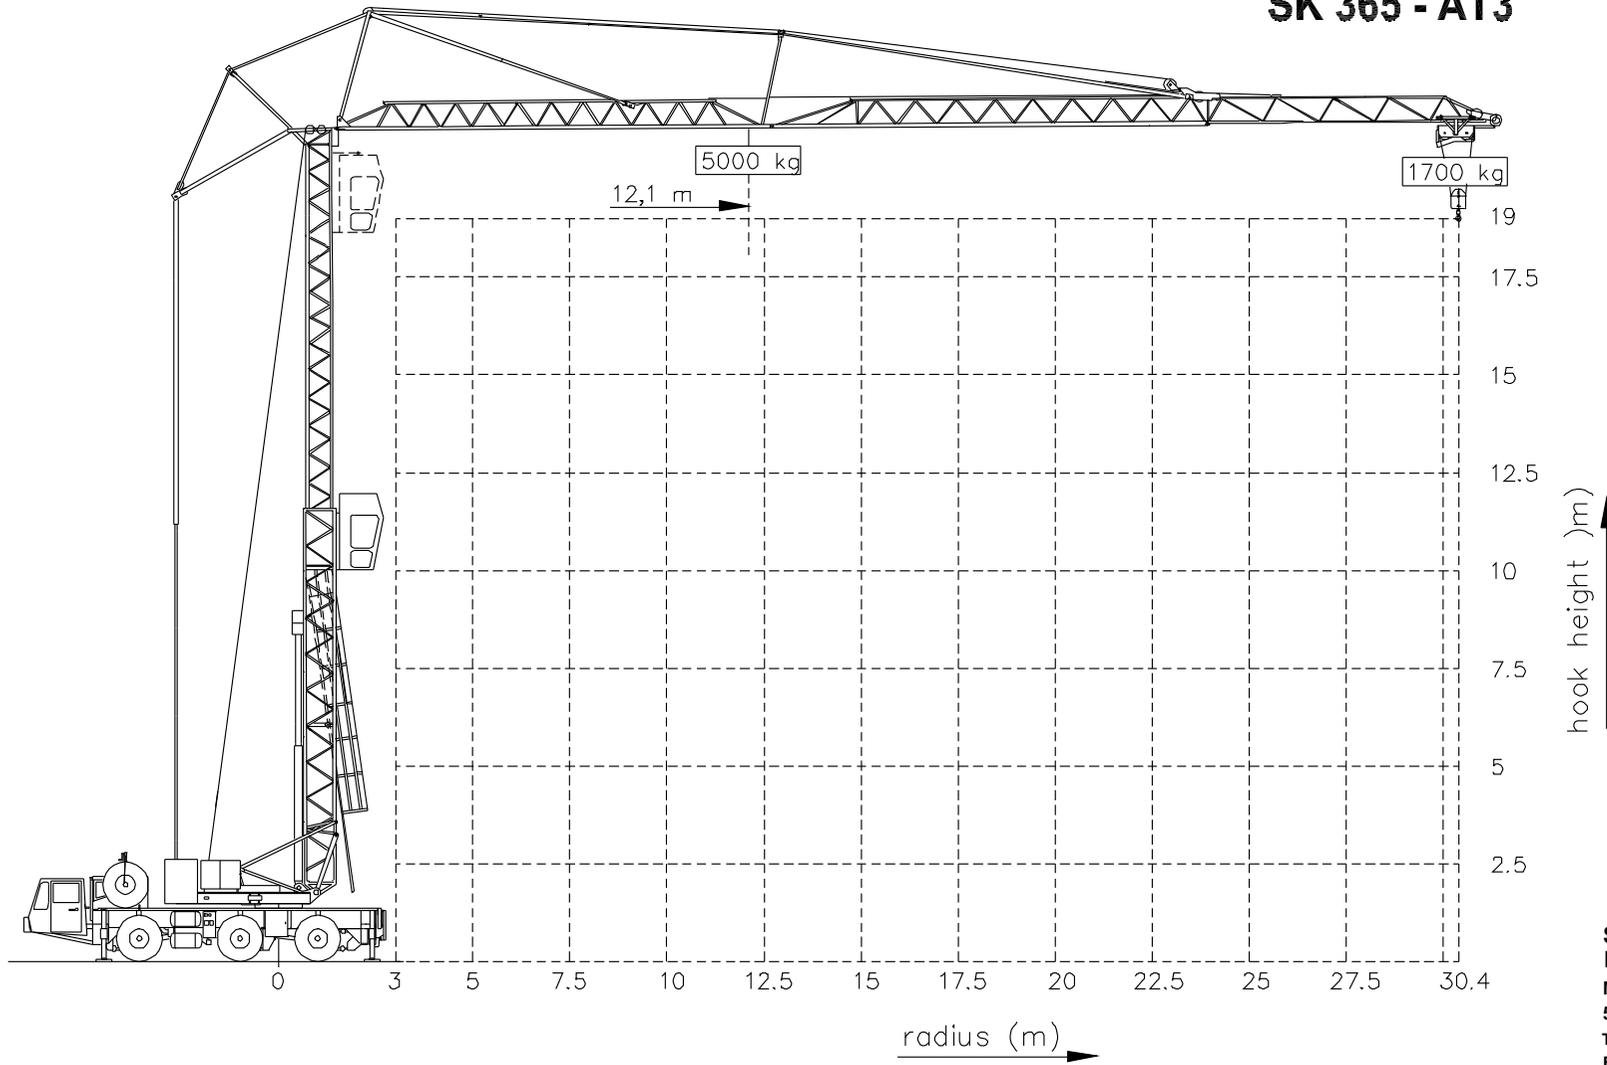

Changes subject to modifications


SPIERINGS
KRANEN bv
Merwedestraat 15
5347 KZ Oss NL
Tel. 0412-626964
Fax 0412-645299

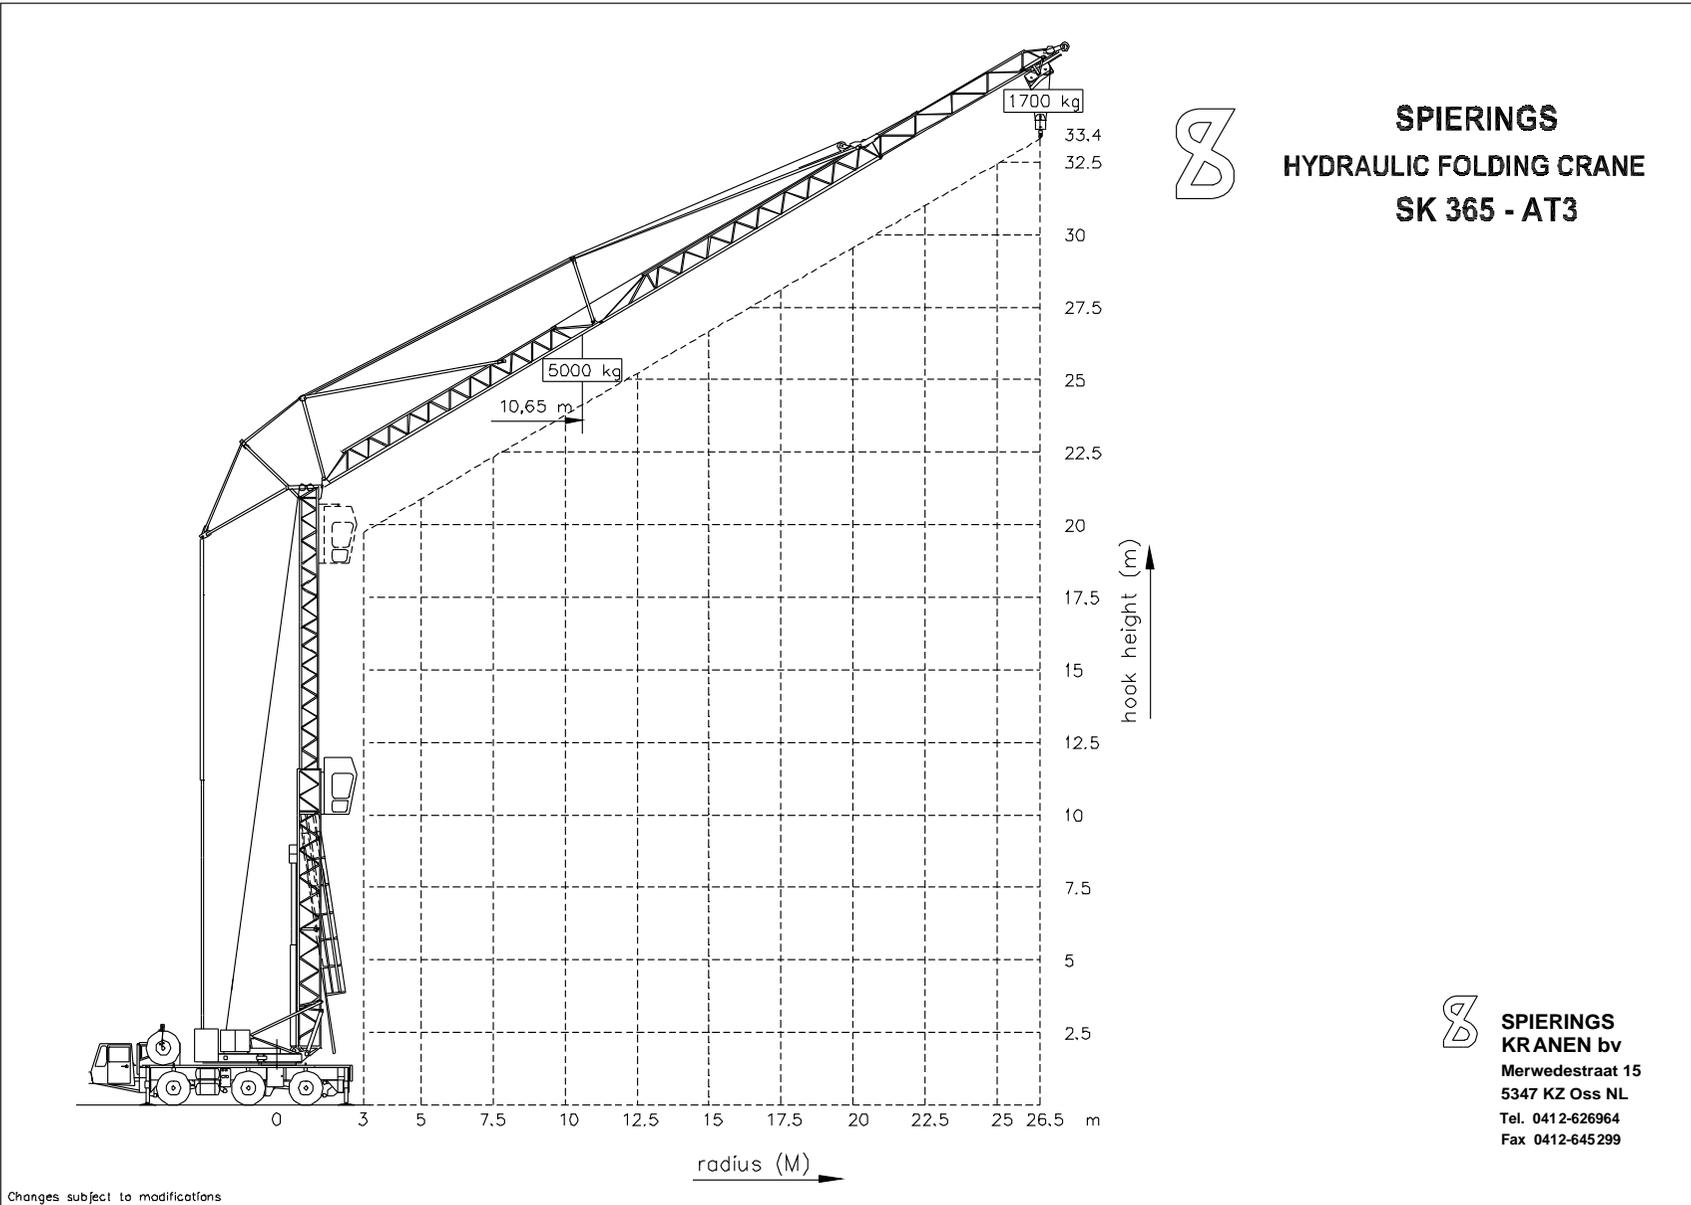

Changes subject to modifications


SPIERINGS
KRANEN bv
 Merwedestraat 15
 5347 KZ Oss NL
 Tel. 0412-626964
 Fax 0412-645299

Drive train SPIERINGS SK365-AT3

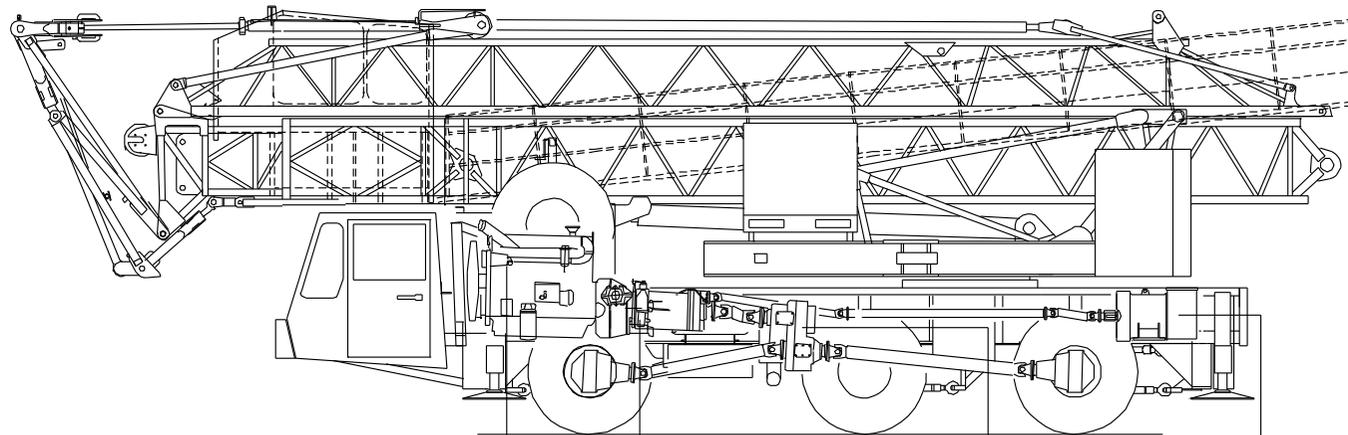

Motor:
DAF RS 222 L (8,65 ltr.)
Power: 222 Kw (2300 rpm)
Torque: 1130 Nm (1400 rpm)

Axle 1

Gearbox ZF 9S109
Manually operated with air power ass.
+ dry plate clutch

Axle 2

Axle 3

Transfer case;
STEYR VG1600/300
Road gear $i=1:0,89$
Off-road gear $i=1:1,54$

Generator;
LSA 44.1M3 - 75kVA

Axles 1 and 3 : GINAF axle with DAF differential and DAF end reduction

Axle 2 : GINAF axle, not driven

Suspension: hydro-pneumatic on all axles, stroke ram 160 mm

Max. speed carrier : 80 km/h

Min speed carrier (diesel engine 1000 rpm) : 1,7 km/h

SPIERINGS FOLDING CRANE
Type SK365-AT3

subject to modifications



Merwedestraat 15
5347 KZ Oss NL
Tel. 0412-626964
Fax 0412-645299