

SK2400-R eLift - 42m

TC: 10072041/A - Hijstabel / Traglasttabelle / Lifting chart / Tableau de levage

Configuratie 1



		m																	42		
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	
	11	LM 2	9000	7841	5831	4597	3763	3162	2708	2353	2067	1833	1637	1471	1329	1205	1096	1001	915	839	770
		kg																			

		m																			
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8			
	11	LM 2	9000	6756	5005	3932	3206	2682	2287	1977	1729	1525	1355	1210	1086	978	884	770			
		kg																			



		m																	42		
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	
	14	LM 1	9000		8419	6966	5918	5127	4508	4011	3603	3261	2972	2724	2508	2319	2152	2003	1870	1750	
	11	LM 2	18000	15183	11413	9101	7538	6410	5559	4893	4358	3919	3551	3240	2973	2741	2537	2357	2197	2054	1925
		kg																			

		m																			
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8			
	14	LM 1	9000		7259	5994	5082	4393	3854	3421	3066	2769	2517	2300	2112	1948	1750				
	11	LM 2	9000	7853	6492	5510	4769	4189	3723	3341	3021	2750	2517	2315	2138	1925					
		kg																			

Configuratie 2




		m																	42		
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	
	14	LM 1	9000		8419	6966	5918	5127	4508	4011	3603	3261	2972	2724	2508	2319	2152	2003	1870	1750	
	11	LM 2	9000		7538	6410	5559	4893	4358	3919	3551	3240	2973	2741	2537	2357	2197	2054	1925		
		kg																			

		m																			
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8			
	14	LM 1	9000		7259	5994	5082	4393	3854	3421	3066	2769	2517	2300	2112	1948	1750				
	11	LM 2	9000	7853	6492	5510	4769	4189	3723	3341	3021	2750	2517	2315	2138	1925					
		kg																			



		m																	42		
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	
	14	LM 1	9000		8459	7477	6688	6040	5499	5039	4645	4003	3738	3502	3290	3100					
	11	LM 2	18000	14892	12390	10586	9224	8158	7302	6600	6012	5514	5086	4715	4389	4102	3846	3617	3410		
		kg																			

		m																		
		3.5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8		
	14	LM 1	9000		8387	7294	6439	5752	5188	4716	4317	3973	3675	3414	3100					
	11	LM 2	9000		7960	7032	6287	5675	5164	4730	4358	4034	3751	3410						
		kg																		



SK2400-R eLift - 42m

TC: 10072041/A - Hijstabel / Traglasttabelle / Lifting chart / Tableau de levage

Configuratie 3



		m																				
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	
	14 LM 1	9000			10.74m		7834	6476	5496	4757	4178	3713	3332	3013	2742	2510	2308	2132	1976	1837	1712	1600
	11 LM 2	9000			11.41m		8458	6999	5946	5151	4530	4031	3621	3278	2987	2738	2521	2331	2164	2014	1880	1760

kg

		m																	
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8	
	14 LM 1	9000		9.56m		8499	6750	5567	4714	4070	3567	3162	2830	2552	2317	2114	1939	1785	1600
	11 LM 2	9000		10.15m		7293	6022	5106	4414	3873	3438	3081	2783	2530	2313	2124	1959	1760	

kg



		m																				
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	
	14 LM 1	9000				15.59m			8730	7595	6707	4507	5994	5408	4919	4147	3837	3566	3326	3113	2922	2750
	11 LM 2	18000		9.43m		16731	13390	11132	9504	8274	7312	6539	5905	5374	4925	4538	4203	3909	3650	3418	3211	3025

kg

		m																
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8
	14 LM 1	9000			13.87m		8839	7530	6542	5769	5148	4638	4211	3850	3540	3270	3034	2750
	11 LM 2	9000			14.80m		8204	7133	6295	5622	5070	4608	4217	3880	3588	3333	3025	

kg

Configuratie 4



		m																				
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	
	17 LM 1	9000				14.54m			8027	6978	6157	5498	4957	4504	4121	3791	3505	3254	3033	2836	2659	2500
	14 LM 2	9000				15.59m			8730	7595	6707	5994	5408	4919	4504	4147	3837	3566	3326	3113	2922	2750

kg

		m																
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8
	17 LM 1	9000			12.87m		8128	6918	6004	5290	4716	4245	3851	3517	3230	2981	2762	2500
	14 LM 2	9000			13.79m		8839	7530	6542	5769	5148	4638	4211	3850	3540	3270	3034	2750

kg



		m																			
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42
	17 LM 1	9000				20.66m			8373	7575	6907	6341	5855	5433	5063	4736	4445	4184	3950		
	14 LM 2	18000		12.30m		15446	13216	11532	10215	9157	8288	7562	6946	6417	5958	5556	5200	4884	4600	4345	

kg

		m																
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8
	17 LM 1	9000			18.21m		8066	7219	6524	5943	5450	5027	4659	4337	3950			
	14 LM 2	9000			19.66m		8823	7901	7145	6513	5977	5516	5116	4766	4345			

kg

SK2400-R eLift - 42m

TC: 10072041/A - Hijstabel / Traglasttabelle / Lifting chart / Tableau de levage

Configuratie 5



		m																				
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	
	17	LM 1	9000				13.69m	8763	7465	6484	5717	5101	4596	4173	3814	3506	3239	3005	2798	2614	2449	2300
	14	LM 2	9000				14.67m	8112	7052	6223	5557	5011	4554	4167	3834	3545	3292	3068	2869	2691	2530	

kg

		m																	
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8	
	17	LM 1	9000				12.14m	7559	6428	5575	4907	4371	3930	3562	3250	2982	2749	2545	2300
	14	LM 2	9000				12.98m	8213	6992	6069	5347	4768	4292	3894	3557	3267	3015	2795	2530

kg



		m																			
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42
	17	LM 1	9000				19.19m	8576	7679	6943	6327	5805	5357	4968	4626	4325	4057	3816	3600		
	14	LM 2	18000	11.46m	17036	14188	12133	10581	9368	8392	7593	6924	6356	5869	5446	5075	4748	4456	4195	3960	

kg

		m																
		5.24	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8
	17	LM 1	9000				16.92m	8368	7396	6615	5974	5438	4983	4593	4254	3957	3600	
	14	LM 2	9000				18.24m	8085	7237	6540	5957	5463	5039	4671	4348	3960		

kg

Configuratie 6



		m																			
		3,5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42
	17	LM 1	9000				18.13m	8027	7183	6491	5913	5422	5001	4635	4315	4031	3779	3553	3350		
	14	LM 2	18000	10.86m	15964	13289	11360	9903	8763	7848	7096	6468	5935	5478	5081	4732	4425	4151	3906	3685	

kg

		m																
		3,5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8
	17	LM 1	9000				16.00m	7831	6917	6183	5581	5077	4650	4283	3965	3685	3350	
	14	LM 2	9000				17.23m	8551	7559	6762	6107	5561	5097	4698	4352	4049	3685	

kg







		m																				
		3,5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	
	17	LM 1	18000				13.72m	17586	15058	13148	11655	10455	9470	8647	7949	7349	6829	6373	5970	5611	5289	5000
	14	LM 2	18000				14.81m	16464	14382	12755	11447	10373	9476	8715	8061	7494	6996	6557	6166	5816	5500	

kg

		m																
		3,5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36,8
	17	LM 1	9000				22.07m	8175	7458	6850	6328	5875	5477	5000				
	14	LM 2	9000				23.91m	8961	8179	7517	6948	6453	6020	5500				

kg



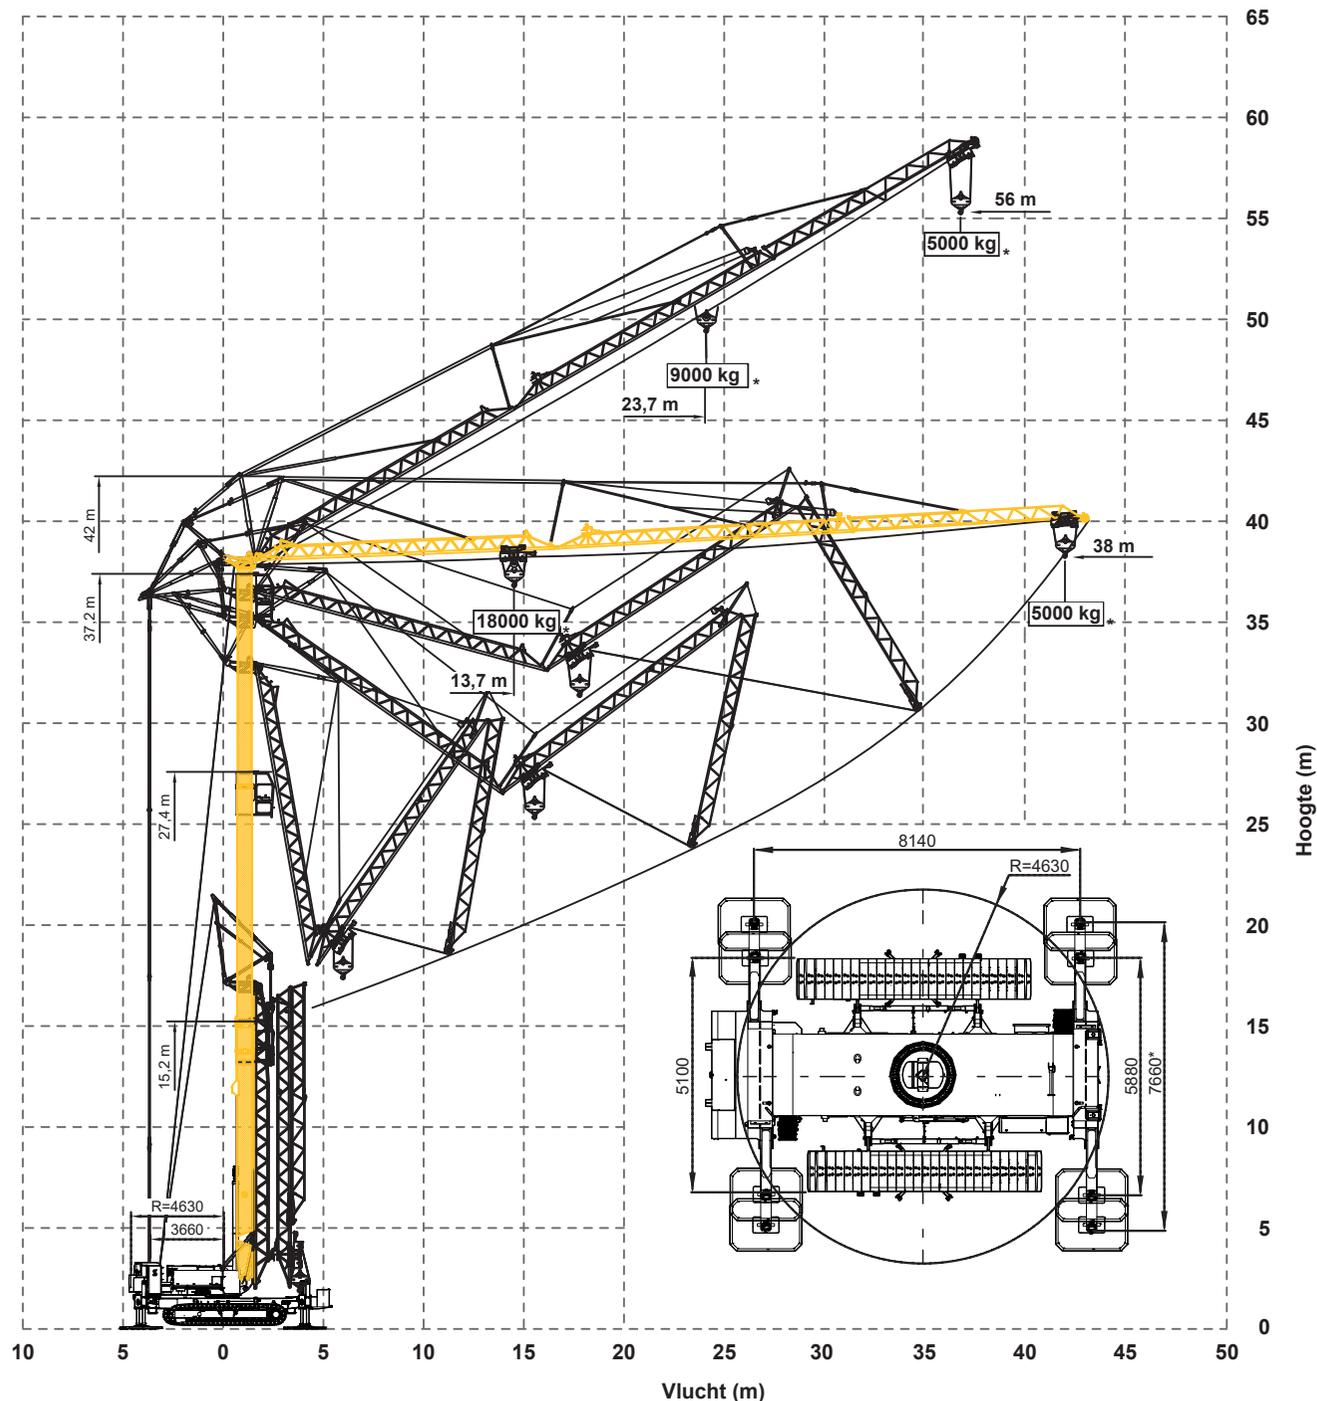

Opbouwschema van de kraan

Max. stempeldruk : 600 KN
 Afm. voetplaat : 1800x1300 mm
 Bodemdruk : 0,26 N/mm²

Giek uitvouwbaar in elke richting (360°)
 30° Toppen mogelijk vanuit de kraancabine
 of via de afstandsbediening

